



enviro® ET SERIES PRO



- 30 to 500 litres per minute
- Robust and compact construction - weatherproof
- Green drive technology - energy efficient motors low power consumption
- Ideal for large grow systems and koi ponds
- Supplied with a brass fitting and L shaped elbow

2
YEAR
WARRANTY



MODEL	FLOW @ PRESSURE	CONNECTOR	POWER	DIMENSIONS
ET 30	30 l/min @ 0.12 bar	14mm	25W	208 x 150 x 178mm
ET 40	40 l/min @ 0.12 bar	14mm	30W	218 x 156 x 182mm
ET 60	60 l/min @ 0.12 bar	18mm	55W	203 x 165 x 153mm
ET 80	80 l/min @ 0.10 bar	18mm	85W	210 x 185 x 171mm
ET 100	100 l/min @ 0.10 bar	18mm	105W	238 x 196 x 177mm
ET 120	120 l/min @ 0.20 bar	18mm	125W	265 x 215 x 198mm
ET 150	150 l/min @ 0.20 bar	18mm	130W	256 x 200 x 222mm
ET 200	200 l/min @ 0.20 bar	18mm	195W	256 x 200 x 222mm
ET 250	250 l/min @ 0.20 bar	26mm	220W	349 x 231 x 219mm
ET 300	300 l/min @ 0.20 bar	26mm	275W	349 x 231 x 219mm
ET 400	400 l/min @ 0.20 bar	26mm	220W	349 x 231 x 219mm
ET 500	500 l/min @ 0.20 bar	26mm	275W	349 x 231 x 219mm





SERVICE KITS:

MODEL	DIAPHRAGM	FILTER	OTHER
ET 30 - 120	2	1	1 Magnet
ET 150 - 200	2	1	8 Valves
ET 250 - 300	4	1	16 Valves
ET 400 - 500	4	1	16 Valves

IDEAL FOR





HYDROPONICS



AQUATICS

At Charles Austen we recommend enviro® pumps are serviced every 18 months, service kits for each pump can be purchased from us. Sign up to our service reminder and we'll remind you when it is due!

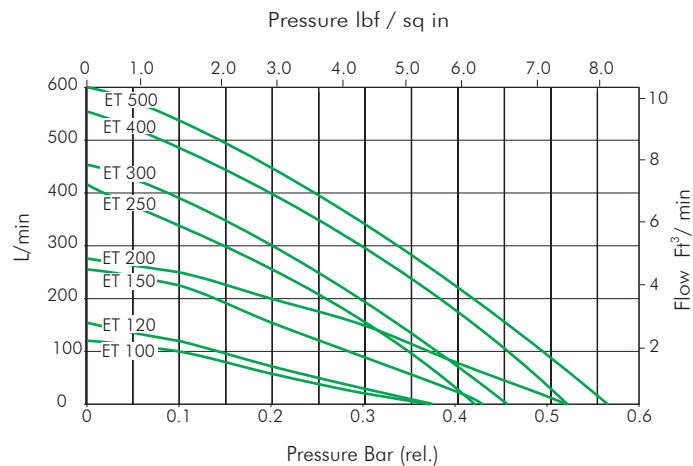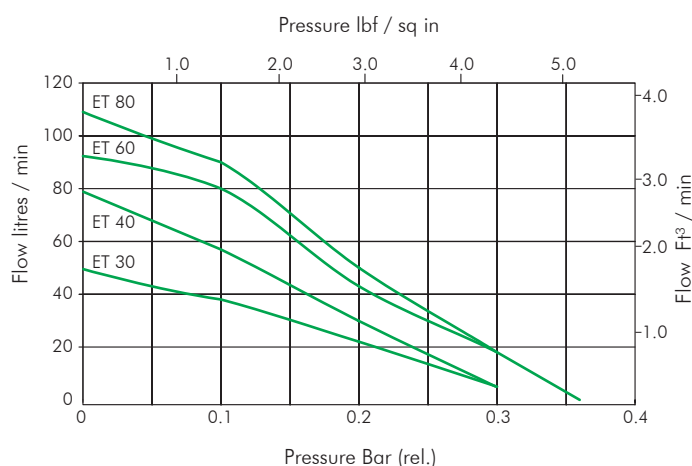

CONNECTIONS

ET40 - Plain, horizontal, connection 14.0mm OD also supplied with screw barbed connector 10.0mm OD

ET60, ET80, ET100, ET120 - Plain, horizontal, connection 18.0mm OD also supplied with screw in barbed connector 12.0mm OD

ET150 - ET500 - Plain, horizontal, connection 18.0mm OD

ACCESSORIES

Elbow connector (included)

Large brass barbed connector 18.0mm and 20.0mm (optional)

Please note - it is important that you ensure the motor specification stated and the range of materials offered in the pump are compatible with the performance, environmental limitations and chemical resistance requirements of the application. For further information or details of our extensive range of pumps, contact our technical sales office who will be pleased to help you select the most suitable pump for your application.